


OPERATION VOLTAGE: 2.7V-5V
OPERATION CURRENT: <1.5mA
SELECTABLE 10SPS OR 80SPS OUTPUT DATA RATE
SIMULTANEOUS 50 AND 60Hz SUPPLY REJECTION

REVISION HISTORY

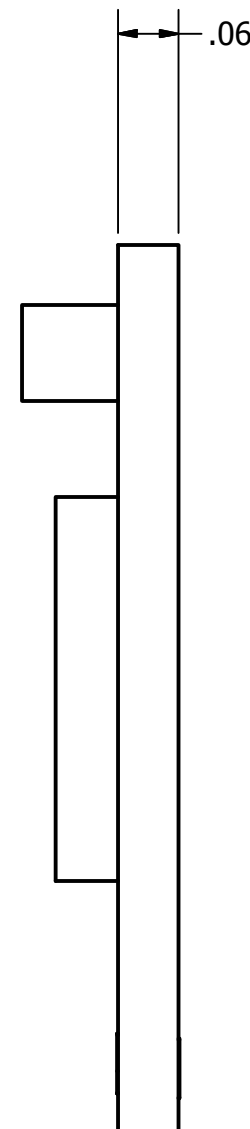

NOTE:

This drawing defines the overall geometry and performance specifications of the part/assembly, and constitutes the acceptance criteria thereof. Only the item(s) described in this document procured from the vendor and/or manufacturer listed hereon are approved for use. A substitute item shall not be used without prior approval. Conformance of hardware to these requirements is acceptable in lieu of vendor and/or manufacturer documentation.

PROTO

Paravion®
Technology Inc.

DRAWN BY	CHK'D BY	APRVD. BY	DATE
EW	LS	JT	8/17/1

© 2017 PARAVION TECH. INC.
PARAVION IS A TRADEMARK
PARAVION TECHNOLOGY INC.